

REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.05.21	DENG	JIN

- Material
 ØScrews : M2.5 steel, Zinc plated,
 •-• slot type
- ØHousing : PA66, UL94V-0
- ØClamp : Copper alloy, Ni plated
- ØPin header : Copper alloy, Tin plated



- Electrical
 UL IEC
 Rated voltage : 300V 250V
 Rated current : 10A 18A
 Contact Resistance: 20mΩ

- Insulation resistance: 500MΩ/1000V
 Withstanding Voltage : AC2000V/1min
 Wire range: 24-12AWG 2.5mm²

- Mechanical
 Operating temperature: -40℃~+105℃
 Soldering temperature:250℃±5/5sec
 Torque: 0.4N.m (3.54Lb.in)
 Strip length: 6-7mm

• RoHS compliance

HOW TO ORDER
 KF128R-5.08-XXP-1 X-XXXXX

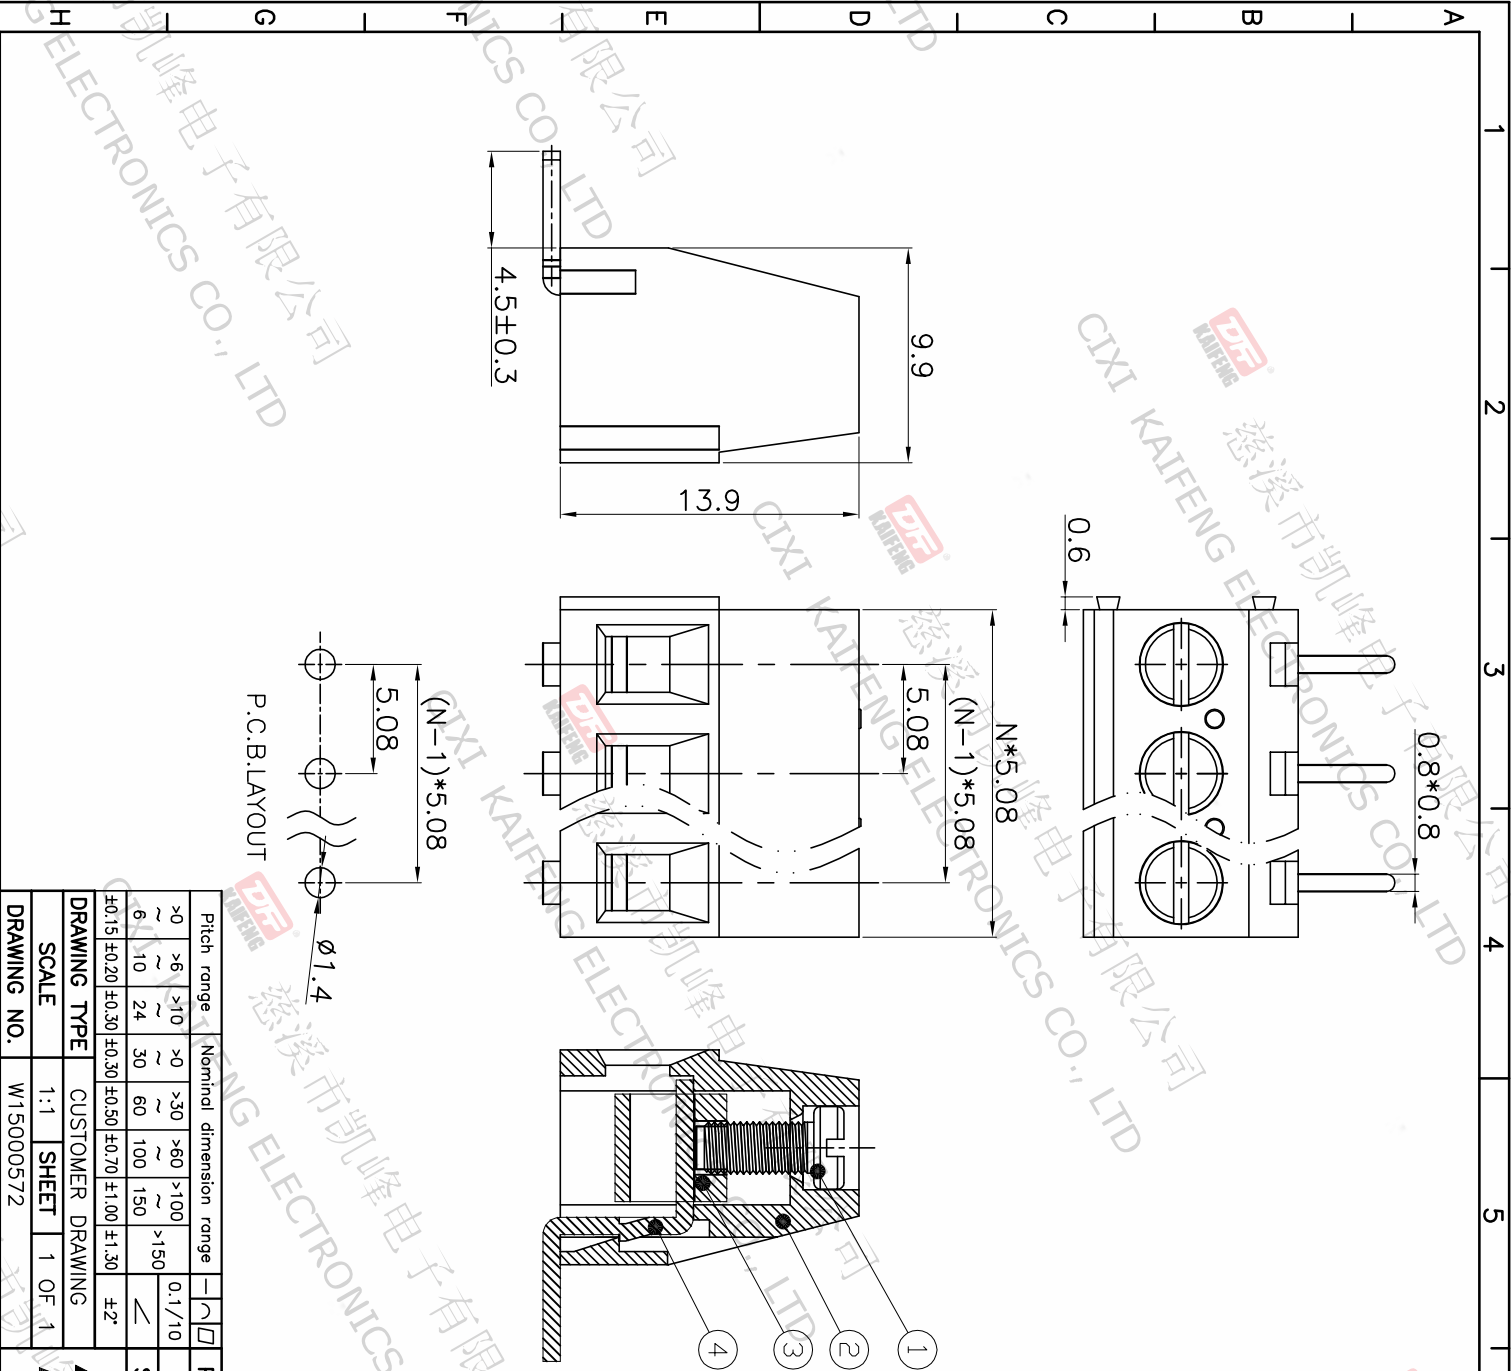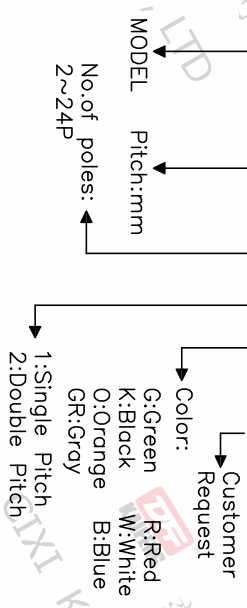

Pitch range	Nominal dimension range	PROJECTION	UNIT	TITLE
>0	>30	0.1/10	mm	KF128R-5.08-XXP-1X
~6	~100	0.1/10	mm	
~10	~150	0.1/10	mm	
~24	~150	0.1/10	mm	
±0.15	±0.30	±2°		

DRAWING TYPE	CUSTOMER DRAWING	SHEET SIZE	SERIES
SCALE	1:1	A4	KF128
DRAWING NO.	W15000572		

DF 慈溪市凯峰电子有限公司
 CIXI KAIFENG ELECTRONICS CO.,LTD