
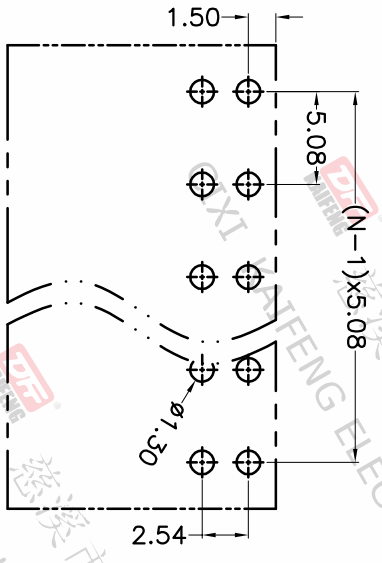
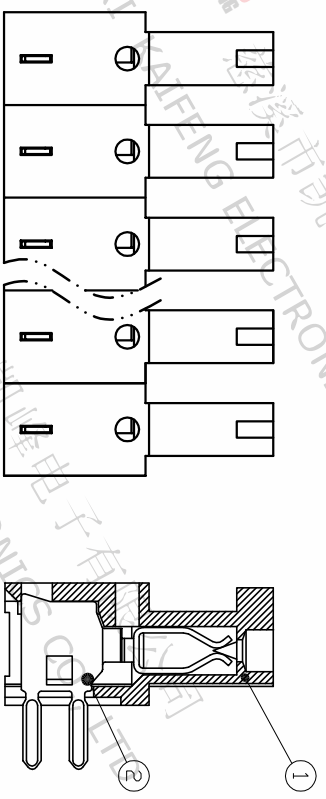


REV.	DESCRIPTION	DATE	DRAFTER	APPROVER
A1	DWG.REL	2020.6.10	ZHANG	JIN

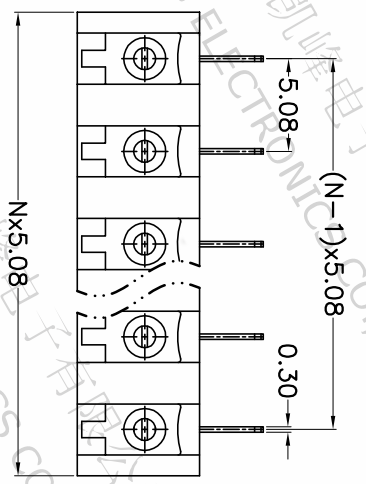

P.C.B. LAYOUT

Pitch range	Nominal dimension range	PROJECTION
>0	>0	0.1/10
~6	~30	~
~10	~60	~
~24	~100	~
±0.15	±0.50	±2°
±0.20	±0.30	±2°
±0.30	±0.50	±2°
±0.70	±1.00	±2°
±1.30	±1.30	±2°

DRAWING TYPE	CUSTOMER DRAWING	SHEET	1 OF 1
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	W10001112		

- Material
 @Housing : PA66, UL94V-0
 @Pin header: Copper-alloy, Tin-plated
- Electrical
 UL IEC
 Rated voltage : 300V 320V
 Rated current : 8A 7A
- Contact resistance : 20mΩ(Max)
 Insulation resistance: 500MΩ/DC500V
 Withstanding Voltage : AC1500V/1min
- Mechanical
 Operating temperature:-40℃~+105℃
 Soldering temperature:250℃±5/5sec
- RoHS compliance

HOW TO ORDER
 KF12EFR-5.08-XXP-1 X-XXXXX

MODEL Pitch:mm
 No.of poles: 2~24P

Color:
 G:Green R:Red
 K:Black W:White
 O:Orange B:Blue
 GR:Gray

Customer Request
 1:Single Pitch
 2:Double Pitch

PROJECTION	UNIT	TITLE
mm	mm	KF12EFR-5.08-XXP-1X
SHEET SIZE	A4	SERIES KF12EFR

DF 慈溪市凯峰电子有限公司
 CIXI KAIFENG ELECTRONICS CO.,LTD