
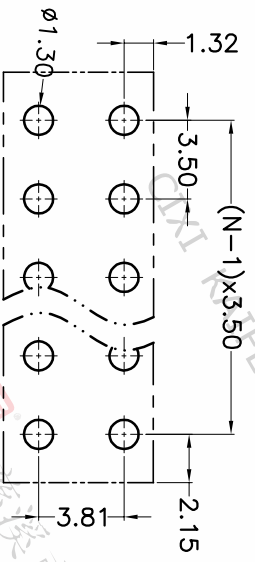
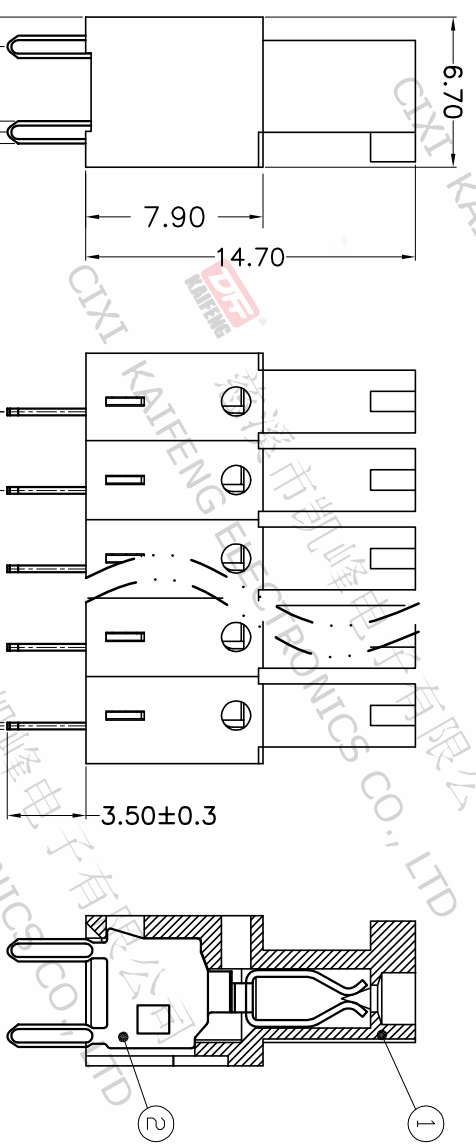


| REV. | DESCRIPTION | DATE | DRAFTER | APPROVER |
|------|-------------|-----------|---------|----------|
| A1 | DWG.REL | 2020.6.10 | ZHANG | JIN |

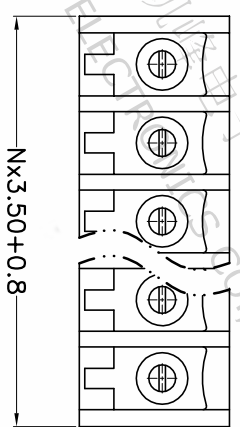


P.C.B. LAYOUT

| Pitch range | Nominal dimension range | PROJECTION | UNIT |
|-------------|-------------------------|------------|------|
| >0 | >0 | 0.1/10 | mm |
| >6 | >10 | | |
| ~ | ~ | | |
| 10 | 24 | | |
| 30 | 60 | | |
| 100 | 150 | | |
| 150 | 1.00 | | |
| ±2° | ±1.30 | | |

| DRAWING TYPE | CUSTOMER DRAWING |
|--------------|------------------|
| SCALE | 1:1 |
| SHEET | 1 OF 1 |
| DRAWING NO. | W10001062 |

- Material
 ØHousing : PA66, UL94V-0
 ØPin header: Copper alloy, Tin plated
- Electrical
 UL IEC
 Rated voltage : 300V 250V
 Rated current : 8A 7A
 Contact resistance : 20mΩ(Max)
 Insulation resistance: 500MΩ/DC500V
 Withstanding Voltage : AC1500V/1min
- Mechanical
 Operating temperature: -40°C ~ +105°C
 Soldering temperature: 250°C ± 5 / 5sec
- RoHS compliance

HOW TO ORDER
 KF12EFV-3.5-XXP-1 X-XXXXX

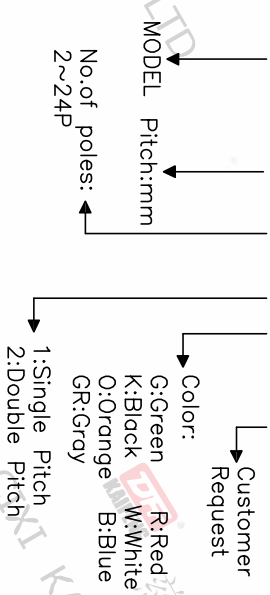

| PROJECTION | TITLE |
|------------|--------------------|
| UNIT | KF12EFV-3.5-XXP-1X |
| SHEET SIZE | A4 |
| SERIES | KF12EFV |

DF 慈溪市凯峰电子有限公司
 CIXI KAIFENG ELECTRONICS CO.,LTD